

# H4-IC set

EFT/Burst Magnetic Field Source



## Short description

The BS 06DB-s magnetic field source is used to generate magnetic EFT/burst fields. An EFT/burst generator (IEC 61000-4-4) supplies the field source with an EFT/burst current via an RF cable. The field source generates high magnetic fields (approx. 200 mT) in very small spaces (2.54 mm<sup>2</sup>). It is thus ideal for coupling the field into ICs. The field source can be inserted into a scanner or can be guided by hand. It has a SMB output.

The connection cable for the magnetic field source is available with an SHV connector (HV SHV-SMB 1m) or with a Fischer connector (HV FI-SMB 1m; a S103A023 Fischer connector). Please specify which cable/connector when placing your order.

## Scope of delivery

- 1x BS 06DB-s, EFT/Burst Magnetic Field Source
- 1x HV SHV-SMB 1 m, High-Voltage Cable, SHV SMB
- 1x H4-IC case, System Case A5
- 1x H4-IC m, H4-IC set User Manual


## Technical parameters

<b>BS 06DB-s EFT/Burst Magnetic Field Source</b>	
Frequency range	0...66 MHz
Resolution	2.54 mm <sup>2</sup>
Generated magnetic flux density	2.37 mT/A
Probe head dimensions	Ø 1.8 mm
Max. generated magnetic flux density	200 mT
Connector - output	SMB, female, jack
<b>Max. Burst-voltage</b>	4 kV

# H4-IC set

EFT/Burst Magnetic Field Source

Application with BS 06DB-s

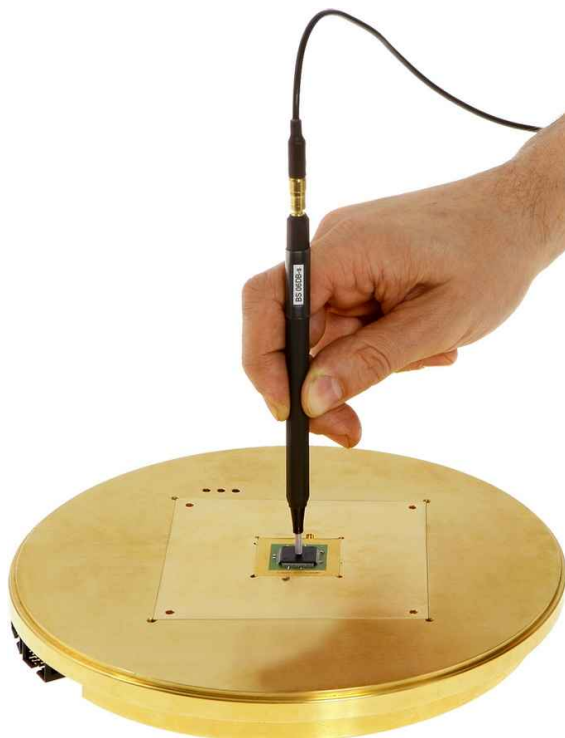

Fischer connector and SHV connector



Scope of delivery with BS 06DB-s and HV SHV-SMB 1 m cable



Scope of delivery with BS 06DB-s and HV FI-SMB 1 m cable

